



Item No. _____

BT7180

Soft Serve Machine



The **BT7180** was designed for various applications. This countertop machine has the smallest equipment footprint in the Donper family. It is designed as a 115V unit so it can plug into most standard outlets. This machine is great for restaurants, schools, amusement parks, outdoor events or catering services.

Features

- Complete stainless steel construction for durability with a sleek and modern appearance
- Powered by most standard outlets
- Digital control panel with adjustable firmness levels capable of serving frozen yogurt, sorbet, ice cream, and gelato
- Perfect for off-site catering events such as: birthday parties, weddings, school functions, fundraisers
- Low mix alert with adjustable freezing cylinder temperature control
- Adjustable flow rate handle for optimal serving speed
- Auto-return handle eliminates waste by returning handle to its original position
- Rapid first time dispensing (7-10 Min)
- Gravity-fed, air-cooled

Shown with Standard 1-Piece Graphics Kit



Conforms to
UL 621
ANSI/NSF-6

1.0




Corporate Headquarters
4225 SW 34th Street
Orlando, Florida 32811
USA


☎ 1.888.350.8091 -Toll Free
☎ 321.202.2683
✉ info@donperamerica.com
🌐 www.donperamerica.com

BT7180 Soft Serve Machine


RIGHT SIDE VIEW

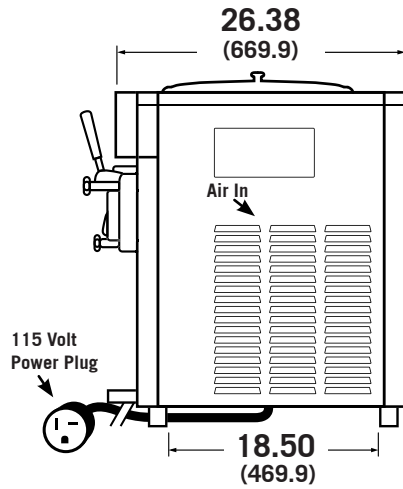

FRONT VIEW

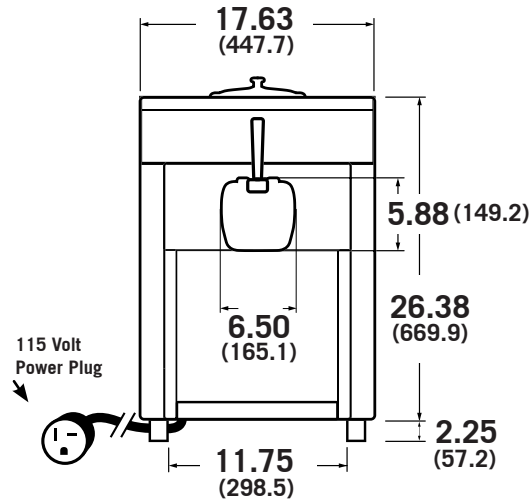

TOP VIEW

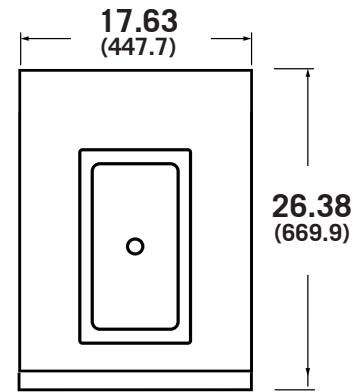

Main measurements in inches. Bracketed measurements in millimeters.
 All measurements require a variance of $\pm 0.125''$.

Capacity

	Qt.	L
Freezing Cylinder	1 x 2.0	1 x 1.9
Refrigerated Hopper	1 x 9.5	1 x 9.0
Production	23-29 / HR	22-28 / HR

Weights

	lbs	kgs
Net	231	105

Refrigeration

R404A	560g
R134a	110g
Condenser Type	Air-Cooled

Electrical

Voltage	115 V
Hertz	60 Hz
Plug type	5-20P
Phase	Single
Breaker Size	20A, Single Pole
Drive Motor	(1)- 0.75 (500 W)

Specifications

Electrical

One dedicated electrical circuit per unit is required.

Air Cooled

A minimum clearance of 8 inches is required on the right and left sides of the machine. A minimum clearance of 12 inches is required on the front and rear faces of the machine.

Clearance

A minimum door clearance of 22 inches is required.

Options

- Custom, 1-Piece Graphics Kit
- Custom, 2-Piece Graphics Kit
- Custom, 3-Piece Graphics Kit
- Custom, 4-Piece Graphics Kit
- Brush Cleaning Kit

Continuous product development may necessitate specification and/or design changes.